Vue d'ensemble

PROTEUS ™ RAYZOR 760	PROTEUS ™ RAYZOR 1960	PROTEUS ™ LUCIUS	PROTEUS ™ EXCALIBUR	PROTEUS ™ HYBRID
SOURCE •7x 60W Osram RGBW LEDs, 28x 2W White SparkLED™ • 50,000 Hour Average LED Life*	SOURCE •19x 60W Osram RGBW LEDs 76x 2W White SparkLED™ •50,000 Hour Average LED Life*	SOURCE • 580W 6,500K Bright White Peak Field LED Engine • 30,000 Hour Average LED Life*	SOURCE •Philips MSD Platinum 500 Flex 550W Lamp • Up to 4,000h Lamp Life*	SOURCE • Philips MSD 21R 470W 8,000K Lamp • 1,000 Hour Average Lamp Life*
PHOTOMETRIC DATA • 7200+ Total Lumen Output	PHOTOMETRIC DATA •18000+ Total Lumen Output	PHOTOMETRIC DATA • 33500+ Total Lumen Output • CRI 71+ (85+ with HCRI Filter)	PHOTOMETRIC DATA • 20000+ Total Lumen Output • CRI 77+	PHOTOMETRIC DATA (15m) • 14000+ Total Lumen Output • CRI 80
EFFECTS • 5° - 77° Beam to Wash Zoom Angle • Linear Color Temperature presets (2700 - 8000K) • RGBW Color Mixing and Pixel Control •White SparkLED™ Lens Effect • 360° Cont. Pan/Tilt Movement	EFFECTS • 5° - 55° Motorized Zoom • Linear Color Temperature Presets (2700 - 8000K) • RGBW Color Mixing and Pixel Control • White SparkLED™ Lens Effect • 360° Cont. Pan/Tilt Movement	EFFECTS • 5.5 - 50° Motorized Zoom • 4 Rotating Full Blackout Framing, +/-50° Index • Animation Wheel • 4-facet and Linear Rotating Prisms • Light and Wash Frost Filters	EFFECTS • 0.8° Beam Angle, Variable Focus • 3.5° Beam Expander • 8-Facet , 4 Facet Linear Prism • 2 Light and Wash Frost Filters • High Speed Mechanical Shutter and Strobe	EFFECTS • Motorized Zoom, 2.1° Beam to 28.6° Spot or 31.2° Wash • Animation Wheel • Frost Filter Hybrid Wash Effect • High Speed Strobe
COLOR • 7x RGBW LEDs • 28x White SparkLED™	COLOR • 19x RGBW LEDs • 76x White SparkLED™	COLOR • Full CMY + CTO Color Mixing • 5 Dichroic Colors incl. High CRI Filter	COLOR • CMY Color Mixing • 14 Dichroic Colors incl. CTO and UV	COLOR • Full CMY + CTO Color Mixing • 14 Dichroic Colors incl. CTB, CTO and UV
GOBOS •N/A	GOBOS •N/A	GOBOS • 3 Gobo Wheels • 13 Rotating/Indexing Interchangeable Glass Gobos • 7 Static Glass Gobos	GOBOS • 2 Gobo Wheels • 8 Rotating / Indexing Interchangeable Glass Gobos • 17 Position Static Gobo Wheel	GOBOS • 8 Interchangeable Rotating / Indexing Glass Gobos • 14 Static-Stamped Metal Gobos
CONTROL / CONNECTIONS • 3 DMX Channel Modes • DMX, RDM, Art-NET, sACN • Locking IP65 5pin XLR + Ethernet In/Out • Locking IP65 Power In	CONTROL / CONNECTIONS •3 DMX Channel Modes • DMX, RDM, Art-NET, sACN • Locking IP65 5pin XLR + Ethernet In/Out • Locking IP65 Power In	CONTROL / CONNECTIONS • 2 DMX Modes • DMX, RDM, Art-NET, sACN • Locking IP65 5pin XLR + Ethernet In/Out • Locking IP65 Power In	CONTROL / CONNECTIONS • 2 DMX Channel Modes • DMX, RDM, Art-NET, sACN • Locking IP65 5pin DMX + Ethernet In/Out • Locking IP65 Power In	CONTROL / CONNECTIONS • 3 DMX Modes (24/26/37) • DMX, RDM, Art-NET, sACN, E-FLY™ • Locking IP65 5pin XLR + Ethernet In/Out • Locking IP65 Power In
SIZE / WEIGHT •LxWxH: 363 x 260 x 493 mm (14.3" x 10.2" x 19.4") •Weight: 18.6 kg (41.0 lbs.)	SIZE / WEIGHT •LxWxH: 376 x 468 x 579 mm (14.8" x 18.4" x 22.8") •Weight: 33.1 kg (73.0 lbs.)	SIZE / WEIGHT • LxWxH: 468 x 370 x 681 mm (18.4" x 14.6" x 26.8") • Weight: 40.8 kg (89.9 lbs.)	SIZE / WEIGHT •LxWxH: 493 x 383 x 697 mm (19.4" x 15.1" x 27.4") •Weight: 49 kg (108 lbs.)	SIZE / WEIGHT •LxWxH: 465 x 571 x 805 mm (18.45" x 22.5" x 37.1") •Weight: 38 kg (84.0 lbs.)

PROTEUS ™ SMARTY HYBRID	PROTEUS ™ BRUTUS	PROTEUS ™ MAXIMUS	PROTEUS ™ RAYZOR BLADE S / L
SOURCE •Philips™ MSD Platinum 200 Flex 280W Lamp • Up to 6,000 Hour Lamp Life*	SOURCE •1200W 6500K Bright White LED Engine •30,000 Hour Average LED Life*	SOURCE • 950W 6500K Bright White Peak Field LED Engine • 30,000 Hour Average LED Life*	SOURCE •6x 60W Osram RGBW LEDs (BLADE S) 12x 60W Osram RGBW LEDs (BLADE L) 50,000 Hour Average LED Life*
PHOTOMETRIC DATA • 11000+ Total Lumen Output	PHOTOMETRIC DATA (estimated) • 75000+ Total Lumen Output	PHOTOMETRIC DATA • 50000+ total lumen output • CRI 70+ (82+ HCRI Filter)	PHOTOMETRIC DATA •12500+ Total Lumen Output
EFFECTS • Beam, Spot, Wash Modes • Motorized Zoom 1°-18° Beam, 3°-27° Spot, 5°-33° Wash • Wash Frost Filter • 16-facet and 5-facet Linear Prisms • High Speed Strobe	EFFECTS •4.5° - 45° Motorized Zoom (220mm / 8.7 in Front Aperture) •Full 360° Bi-Directional Animation Wheel •Variable Frost Filter •Optional Rotating Full Blackout Framing Module	EFFECTS • 5.5° - 55° Motorized Zoom (Large 180mm Front Aperture) • 4 Rotating Full Blackout Framing, +/-50° Index • Animation Wheel • 4-facet and Linear Rotating Prisms • Light and Wash Frost Filters	EFFECTS •5° - 45° Motorized Zoom •Linear Color Temperature presets (2700 - 8000K) •RGBW Color Mixing and Pixel Control •White SparkLED™ Lens Effect •Dual White Strobe Lines •192° Tilt Angle
COLOR • Full CMY Color Mixing • 13 Colors Incl. Quad Color, CTO, CTB and UV	COLOR •CMY Color Mixing •Linear CTO Color Correction	COLOR • Full CMY + CTO Color Mixing • 6 Dichroic Colors incl. High CRI Filter and UV	COLOR • 6x RGBW LEDs / 12x RGBW LEDs (BLADE S) • 12x RGBW LEDs / 48x RGBW LEDs (BLADE L) • 24x / 48x 2W White SparkLED™ • 256x 1W Strobe LED
GOBOS • 2 Gobo Wheels • 8 Rotating / Indexing Interchangeable Glass Gobos • 12 Static-Stamped Metal Gobos	GOBOS •5 Rotating / Indexing Beam Shaping + FX Gobos •1 Rotating Multi Color Glass Gobo Optional Framing Module	GOBOS • 2 Gobo Wheels • 6 Rotating / Indexing Interchangeable Glass Gobos • 7 Static Glass Gobos	GOBOS •N/A
CONTROL / CONNECTIONS • 2 DMX Modes (20 / 34) • DMX, RDM, Art-NET, sACN • Locking IP65 5pin XLR + Ethernet In/Out • Locking IP65 Power In	CONTROL / CONNECTIONS •2 DMX Channel Modes •DMX, RDM, Art-NET, sACN • Locking IP65 5pin XLR + Ethernet In/Out • Locking IP65 Power In	CONTROL / CONNECTIONS • 2 DMX Modes (37 / 61) • DMX, RDM, Art-NET, sACN • Locking IP65 5pin XLR + Ethernet In/Out • Locking IP65 Power In	CONTROL / CONNECTIONS • DMX, RDM, Art-NET, sACN • Locking IP65 5pin XLR + Ethernet In/Out • Locking IP65 Power In
SIZE / WEIGHT •444.7 x 459 x 685 mm (17.5" x 17.88" x 26.97") •Weight: 35.5 kg (78.26 lbs.)	SIZE / WEIGHT •643.6 x 456.9 x 869 mm (25.3" x 18" x 34.2") Weight: 47.2 kg (104.1 lbs.)	SIZE / WEIGHT •458 x 591 x 825 mm (18" x 23.3" x 32.5") •Weight: 53 kg (117 lbs.)	SIZE / WEIGHT •500 x 190mm x 345 mm (BLADE S) 1000 x 190mm x 345 mm (BLADE L) •Weight: 17.9 kg (39.4 lbs.) (BLADE S) 33 kg (72.7 lbs.) (BLADE L)

Elation Professional Europe
Junostraat 2 • 6468 EW Kerkrade • The Netherlands
www.elationlighting.eu

*La durée de vie des lampes et des LED peut varier en fonction de plusieurs facteurs, y compris, mais sans s'y limiter, les conditions environnementales, la puissance et la tension : Les conditions environnementales, la puissance et la tension,
les modes d'utilisation (cycles marche-arrêt), le contrôle et la gradation. Gobos et couleurs. Les spécifications peuvent être modifiées sans préavis.

PROTEUS

ARTISTE

FUZE

ELATION PROFESSIONAL

BEST AUDIO & LIGHTING
www.bestaudio-lighting.fr

PROTEUS™

TÊTES MOBILES IP65 À LA POINTE DE L'INDUSTRIE



PROTEUS™
RAYZOR 760



PROTEUS™
RAYZOR 1960



PROTEUS™
LUCIUS



PROTEUS™
EXCALIBUR



PROTEUS™
SMARTY HYBRID



PROTEUS™
HYBRID




PROTEUS™
BRUTUS



PROTEUS™
MAXIMUS

PROTEUS™
RAYZOR BLADE L

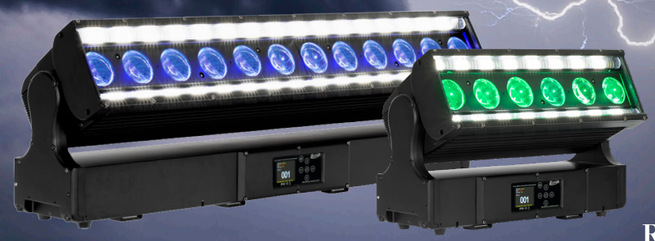

PROTEUS™
RAYZOR BLADE S

Proteus est la première gamme de luminaires extérieurs IP65 du marché. En éliminant le besoin de revêtements étanches coûteux et encombrants, la gamme Proteus primée
offre aux concepteurs, aux intégrateurs et à tous les professionnels de l'éclairage l'ensemble d'outils le plus robuste, le plus puissant et le plus complet pour l'éclairage dans pratiquement toutes les conditions météorologiques ou environnementales.

UNE PERFORMANCE COMPLÈTE

Les luminaires Proteus sont dotés de nombreuses fonctionnalités pour une créativité ultime et un impact maximal. Le Proteus Lucius et le Proteus Maximus, par exemple, sont dotés d'un ensemble complet d'effets spéciaux (gobos, prismes, animation, frost, iris, shutter/strobe et couteaux). Avec une utilisation flexible comme projecteur de profile, faisceau ou wash, ce sont des appareils idéaux pour toute application extérieure ou intérieure nécessitant une luminosité, un faisceau puissant et des effets et des couleurs d'une précision étonnante. Aussi élégants que puissants, ils offrent au concepteur un ensemble FX complet pour mettre en valeur toute scène et tout artiste.

MULTI-FUNCTION

Conçus pour une fonctionnalité polyvalente, les luminaires Proteus peuvent souvent jouer plusieurs rôles dans un même dispositif d'éclairage. Le Proteus Hybrid 3-en-1, par exemple - sans doute la tête mobile IP65 la plus réussie du marché - offre des modes spot, beam et wash, un luminaire tout-en-un flexible qui favorise la créativité des concepteurs. Avec un mélange complet de couleurs CMY et CTO et de nombreuses fonctions de conception professionnelle, cette solution d'éclairage haute performance est conçue pour exceller dans toutes les conditions météorologiques.

DECOUPER LE CIEL

Le Proteus Excalibur est le projecteur à faisceau complet IP65 le plus lumineux jamais créé et convient parfaitement à tous les types de spectacles nocturnes en extérieur. Destiné à devenir le nouveau SkyTracer du XXIe siècle, sa puissance extrême, son faisceau à longue portée et sa large ouverture frontale projettent de puissants rayons lumineux qui transpercent le ciel. En parlant de puissance qui pour de grandes distances, le Proteus Brutus génère un flux extraordinaire de 70 000 lumens pour des faisceau perçant et des washs de haute intensité.

SOYEZ MALIN

Le Proteus Smarty Hybrid est un luminaire hybride multifonctionnel de type beam, spot, wash utilisant la lampe à décharge FLEX 200 de 6 000 heures. Impressionnant de puissance pour un appareil aussi compact et capable de zoomer dans tous les modes, son système de mélange de couleurs CMY complet plus CTO, couleurs supplémentaires, gobos et prismes en font un outil de conception tout-en-un précieux pour tout spectacle. Le Proteus Excalibur bénéficie également d'une lampe FLEX à haut rendement pour une longue durée de vie, une consommation d'énergie réduite et une maintenance réduite du projecteur.

WASH, BEAM, SPARKLE

Le Proteus Rayzor 760 et le Proteus Rayzor 1960 sont des luminaires à effets wash LED compacts mais extrêmement puissants, dotés d'un zoom qui projette des faisceaux en plein air bien définis, ainsi qu'une couverture wash exceptionnellement large et des effets qui attirent le regard. Un système unique d'éclairage d'arrière-plan SparkLED™ leur confère une couche d'effet supplémentaire qui se démarque sur n'importe quel spectacle et la rotation panoramique/inclinaison continue à 360° ajoute une polyvalence supplémentaire. Le Proteus Rayzor Blade, un wash linéaire avec ligne stroboscopique haute intensité, comprend également le système unique SparkLED.

Les spécifications peuvent être modifiées sans préavis