
Vue d'ensemble

PALADIN CUBE	PALADIN BRICK	PALADIN PANEL
SOURCE • 9x 15W RGBW Multi-Chip LEDs • 3200 Total Output Lumens • 50,000 Hour Average LED Life*	SOURCE • 24x 15W RGBW Multi-Chip LEDs • 8200 Total Output Lumens • 50,000 Hour Average LED Life*	SOURCE • 50x 15W RGBW Multi-Chip LEDs • 20000 Total Output Lumens • 50,000 Hour Average LED Life*
PHOTOMETRIC DATA (3m) • 6000K Color Temperature • 3,200 Total Lumen Output • 14.1° Beam 24.7° Field Angle (without Diffuser) • 30° Beam 59° Field Angle (with Diffuser)	PHOTOMETRIC DATA (3m) • 6000K Color Temperature • 8,200 Total Lumen Output • 14.1° Beam 25.4° Field Angle (without Diffuser) • 25.3° Beam 50° Field Angle (with Diffuser)	PHOTOMETRIC DATA (3m) • 6000K Color Temperature • 20,000 Total Lumen Output • 13.5° Beam 24.3° Field Angle (without Diffuser) • 25.2° Beam 50.1° Field Angle (with Diffuser)
EFFECTS • Pixel Zone Controlled LEDs • Fanless Design • High Speed Electronic Shutter and Strobe • Variable Dimming Curves, Dim Modes and Dimming Delays	EFFECTS • Pixel Zone Controlled LEDs • High Speed Electronic Shutter and Strobe • Variable Dimming Curves, Dim Modes and Dimming Delays	EFFECTS • Pixel Zone Controlled LEDs • High Speed Electronic Shutter and Strobe • Variable Dimming Curves, Dim Modes and Dimming Delays
COLOR • RGBW Multi-Chip LEDs	COLOR • RGBW Multi-Chip LEDs	COLOR • RGBW Multi-Chip LEDs
CONTROL / CONNECTIONS • 11 DMX Channel Modes (3 - 32) • DMX and RDM Protocol Support • Adjustable Refresh Frequency (900 – 25,000Hz) • 8 / 16 Bit Dimming Control • 4 Button Control Panel • 180° Reversible OLED Menu Display • Elation's E-FLY™ Internal Wireless DMX Transceiver • IP65 Locking 5-Pin XLR • IP65 Locking Power Connector In/Out	CONTROL / CONNECTIONS • 11 DMX Channel Modes (3 - 56) • DMX and RDM Protocol Support • Adjustable Refresh Frequency (900 – 25,000Hz) • 8 / 16 Bit Dimming Control • 4 Button Control Panel • 180° Reversible OLED Menu Display • Elation's E-FLY™ Internal Wireless DMX Transceiver • IP65 Locking 5-Pin XLR • IP65 Locking Power Connector In/Out	CONTROL / CONNECTIONS • 11 DMX Channel Modes (3 - 88) • DMX and RDM Protocol Support • Adjustable Refresh Frequency (900 – 25,000Hz) • 8 / 16 Bit Dimming Control • 4 Button Control Panel • 180° Reversible OLED Menu Display • Elation's E-FLY™ Internal Wireless DMX Transceiver • IP65 Locking 5-Pin XLR • IP65 Locking Power Connector In/Out
SIZE / WEIGHT • Length: 199.11 mm (7.8") • Depth: 139 mm (5.4") • Height: 248.04 mm (7.8") • Weight: 4.75 kg (10.5 lbs.)	SIZE / WEIGHT • Length: 438 mm (17.2") • Width: 147 mm (5.8") • Vertical Height: 286 mm (11.3") • Weight: 9.5 kg (20.9 lbs.)	SIZE / WEIGHT • Length: 531 mm (20.9") • Width: 148 mm (5.8") • Vertical Height: 348 mm (13.7") • Weight: 15 kg (33.0 lbs.)
ELECTRICAL / THERMAL • AC 100-240V - 50/60Hz • 120W max Power Consumption • -15°C to 45°C (5°F to 113°F)	ELECTRICAL / THERMAL • AC 100-240V - 50/60Hz • 390W max Power Consumption • -15°C to 45°C (5°F to 113°F)	ELECTRICAL / THERMAL • AC 100-240V - 50/60Hz • 800W max Power Consumption • -15°C to 45°C (14°F to 113°F)
INCLUDED ITEMS • Magnetic 20° Filter • IP65 locking power cable	INCLUDED ITEMS • Magnetic 20° Filter • IP65 locking power cable	INCLUDED ITEMS • Magnetic 20° Filter • IP65 locking power cable
OPTIONAL ACCESSORIES (Sold Separately) • Barndoor for Paladin Cube • Shader for Paladin Cube • Paladin Cube Filter 20° • Paladin Cube Filter 60° • Paladin Cube Filter 100° • Paladin Cube Filter 60x10° • Paladin Cube Filter 40x1° • IP Tester • E-Fly Transceiver	OPTIONAL ACCESSORIES (Sold Separately) • Barndoor for Paladin Brick • Shader for Paladin Brick • Paladin Brick Filter 20° • Paladin Brick Filter 60° • Paladin Brick Filter 100° • Paladin Brick Filter 60x10° • Paladin Brick Filter 10x60° • Paladin Brick Filter 40x1° • Paladin Brick Filter 1x40° • IP Tester • E-Fly Transceiver	OPTIONAL ACCESSORIES (Sold Separately) • Barndoor for Paladin Panel • Shader for Paladin Panel • Paladin Panel Filter 20° • Paladin Panel Filter 60° • Paladin Panel Filter 100° • Paladin Panel Filter 60x10° • Paladin Panel Filter 10x60° • Paladin Panel Filter 40x1° • Paladin Panel Filter 1x40° • IP Tester • E-Fly Transceiver

Elation Professional Europe
Junostraat 2 • 6468 EW Kerkrade • The Netherlands
www.elationlighting.eu

*Conditions du laboratoire d'essai. Peut varier en fonction de plusieurs facteurs, y compris, mais sans s'y limiter, les conditions environnementales : Conditions environnementales, puissance/tension, modes d'utilisation (cycles marche-arrêt), contrôle et gradation.
Les spécifications peuvent être modifiées sans préavis.



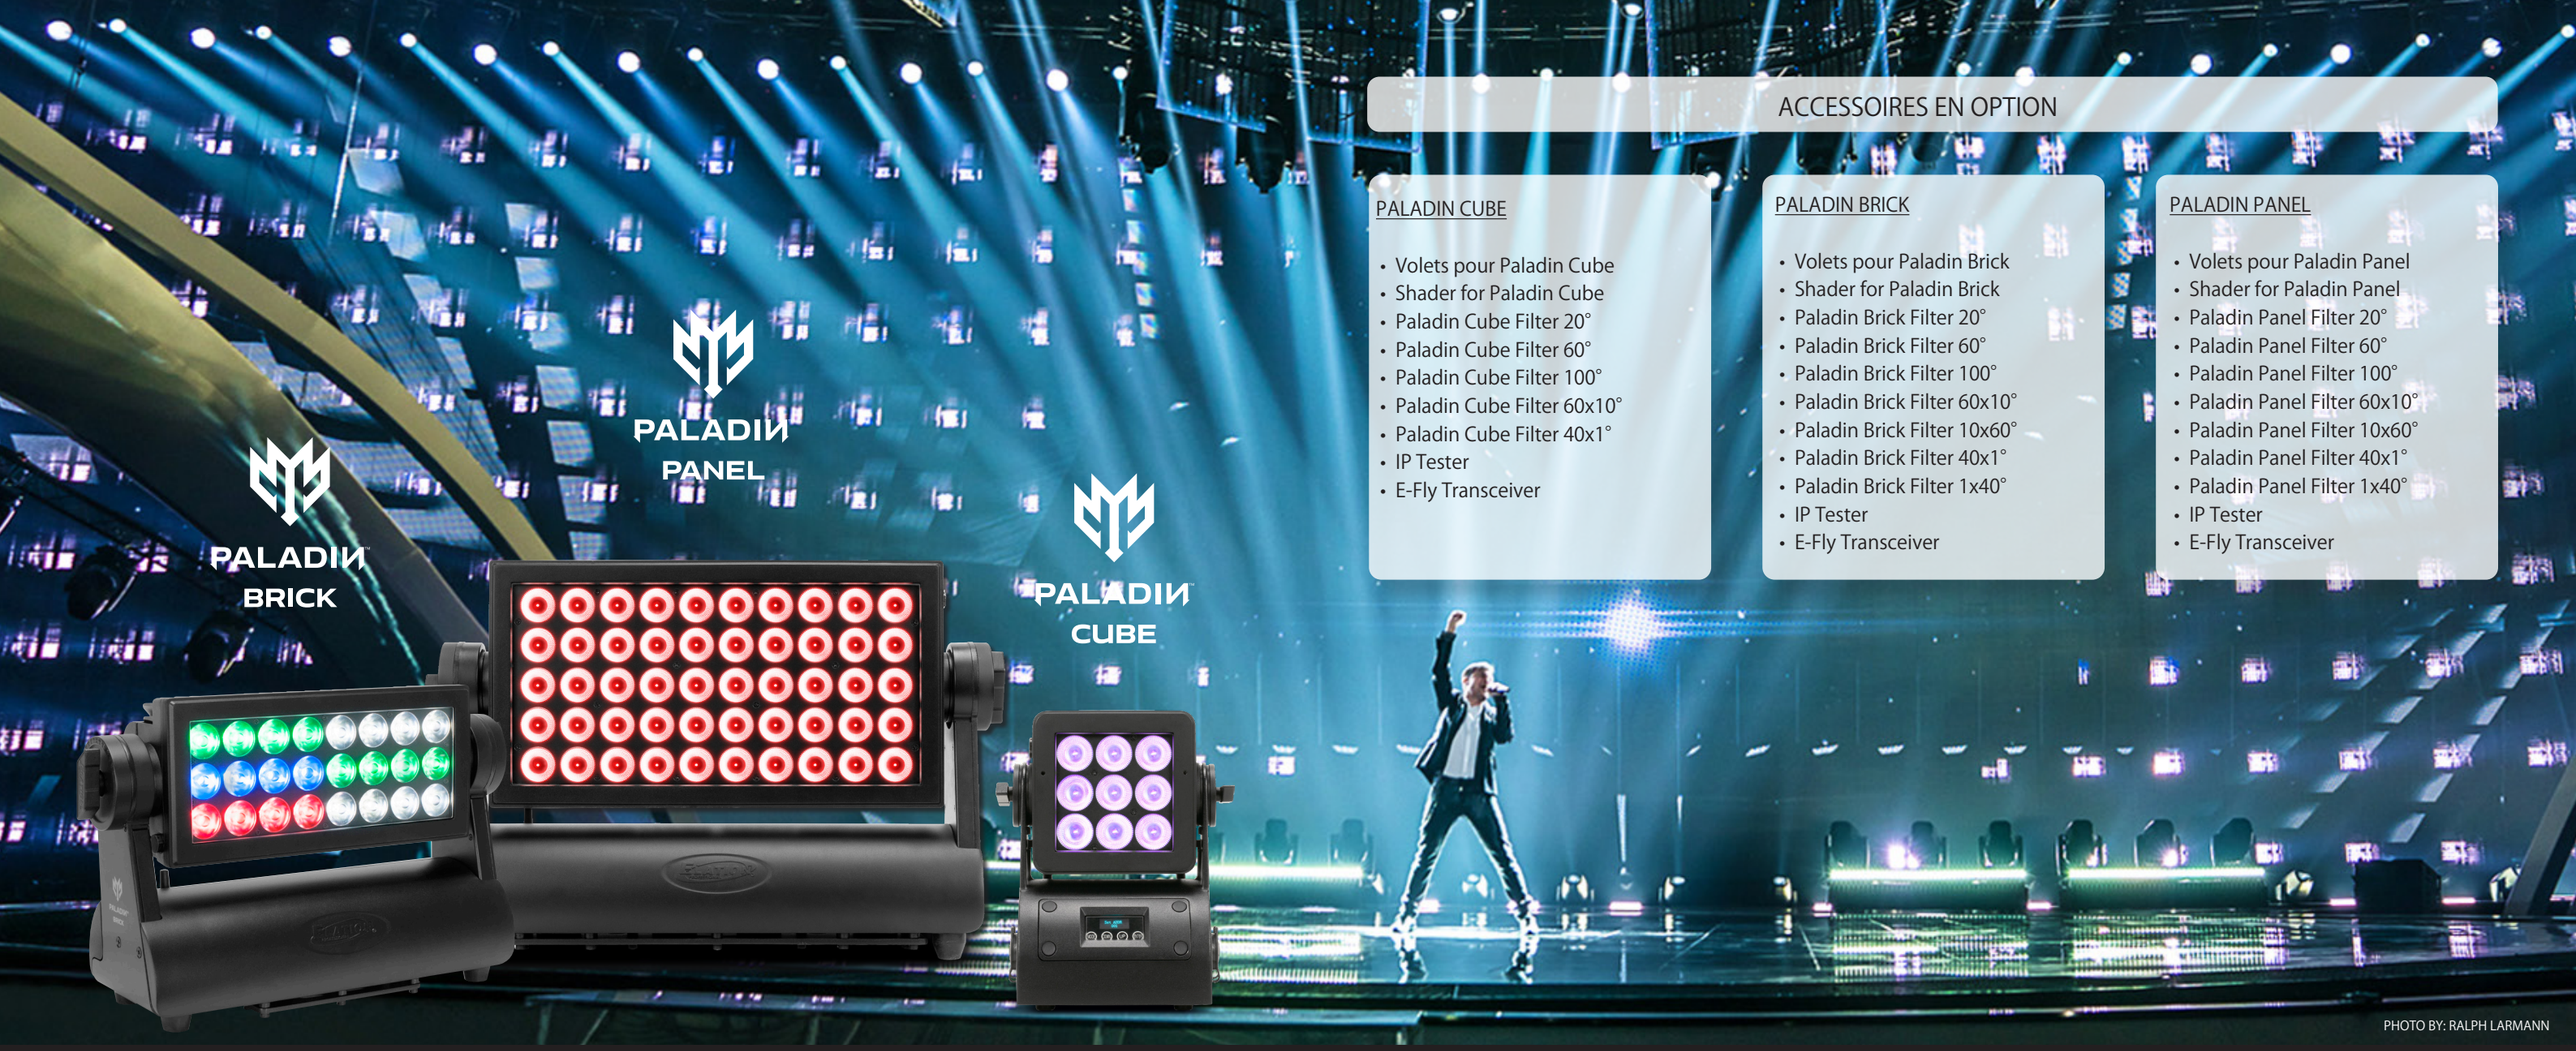

ACCESSOIRES EN OPTION

PALADIN CUBE

- Volets pour Paladin Cube
- Shader for Paladin Cube
- Paladin Cube Filter 20°
- Paladin Cube Filter 60°
- Paladin Cube Filter 100°
- Paladin Cube Filter 60x10°
- Paladin Cube Filter 40x1°
- IP Tester
- E-Fly Transceiver

PALADIN BRICK

- Volets pour Paladin Brick
- Shader for Paladin Brick
- Paladin Brick Filter 20°
- Paladin Brick Filter 60°
- Paladin Brick Filter 100°
- Paladin Brick Filter 60x10°
- Paladin Brick Filter 10x60°
- Paladin Brick Filter 40x1°
- Paladin Brick Filter 1x40°
- IP Tester
- E-Fly Transceiver

PALADIN PANEL

- Volets pour Paladin Panel
- Shader for Paladin Panel
- Paladin Panel Filter 20°
- Paladin Panel Filter 60°
- Paladin Panel Filter 100°
- Paladin Panel Filter 60x10°
- Paladin Panel Filter 10x60°
- Paladin Panel Filter 40x1°
- Paladin Panel Filter 1x40°
- IP Tester
- E-Fly Transceiver

PHOTO BY: RALPH LARMANN

Paladin est une nouvelle gamme de projecteurs hybrides. Bien sûr, il s'agit d'un puissant wash decouleur, mais les luminaires Paladin fonctionnent également comme des stroboscopes de haute puissance.
Blinder de haute puissance ou d'effets visuels dans un seul et même luminaire. Avec une protection IP65 contre les intempéries, ils peuvent être utilisés pour n'importe quel spectacle ou événement, à l'intérieur ou à l'extérieur.

TOUTE LA FAMILLE

Le Paladin Panel, le Paladin Brick et le Paladin Cube sont des projecteurs d'extérieur compacts et puissants, utiles pour une grande variété d'applications, des washs de scène/de décor aux effets stroboscopiques à fort impact, en passant par les éclairages dynamiques et les effets d'optique. Utilisant des cellules RVBW de 15W - 9, 24 et 50 respectivement - ils ajoutent des couleurs vibrantes aux événements extérieurs, tandis que le contrôle individuel des cellules et le stroboscope en font des lumières d'effets ou des blinders pour le public. Pour plus de dynamisme, le contrôle de zones à pixels multiples permet d'obtenir des effets spectaculaires.

Les spécifications peuvent être modifiées sans préavis